



Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.2709 ESU
Description	X3NiCoMoTi18-9-5
AISI/SAE	1.2709 ESR
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.eu/alternatives/1.2709ESR

Specifications



Precision round steel with machining allowance [PRS/BA]
peeled / rough-turned
L: 500 mm
L: 1.000 mm



Round steel [RS]
black
L: 500 mm
L: 1.000 mm

Chemical composition AISI/SAE 1.2709 ESR (reference value %)

C	Si	Mn	P	S	Cr	Mo	Ni	Ti	Co
0 - 0,03	0 - 0,1	0 - 0,15	0 - 0,01	0 - 0,1	0 - 0,25	4,5 - 5,2	17,0 - 19,0	0,8 - 1,2	8,5 - 10,0

Physical properties

Hardness (delivery condition)	max. 325 HB, tempered							
Tensile strength R_m (as received condition)	approx. 1.100 N/mm ²							
Working hardness	max. 56 HRC							
Thermal expansion coefficient $10^{-6} m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 350°C	20 - 400°C	20 - 450°C	20 - 500°C	
	10,1	10,5	10,9	11,1	11,3	11,5	11,8	
Thermal conductivity $W/(m \cdot K)$	23°C	150°C	300°C	350°C	400°C	500°C		
	18,4	20,4	22,7	23,2	23,5	24,0		

Technical properties

Ultra-high strength tool steel with excellent toughness, high yield point and high tensile strength. Easy heat treatment at low temperatures. Good dimensional stability and low distortion. Good machinability when hardened.

Applications

Slides, gear cutting tools, cold heading tools, embossing tools, press dies, hot press molds and tools, tool holders, cutting punches, die casting moulds (for light metal alloys), plastic moulds, reinforcements, light metal processing, shear knives, nozzles, distributor pins, cores.

ABRAMS PREMIUM STEEL

is a registered trademark of
Abrams Engineering Services GmbH & Co. KG
Hannoversche Str. 38 · 49084 Osnabrueck / Germany
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865
VAT-No.: DE 221940667
General Partner: Abrams Engineering Verwaltungs GmbH
Amtsgericht Osnabrueck / Germany, HRB 20019

T: +49 (0) 5 41/3 57 39-0
F: +49 (0) 5 41/3 57 39-39

sales@premium-steel.eu
www.premium-steel.eu
www.shop.premium-steel.eu
www.steel-guide.eu


www.premium-steel.eu/news



Heat treatment

	Temperature	Cooling	Hardness
Soft annealing	850 - 1100°C	Furnace	max. 325 HB
Hardening	Temperature approx. 490°C	Quenching in Air	

Tempering diagram

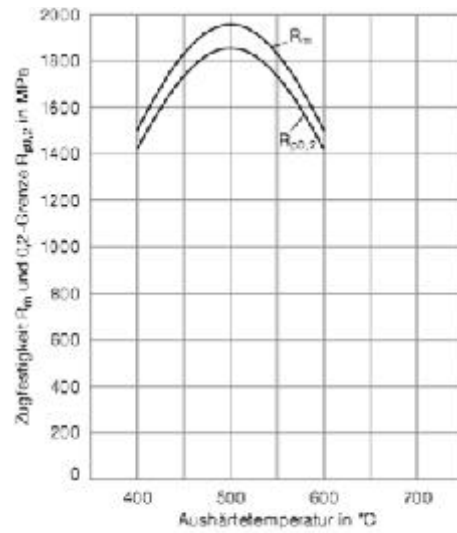

ABRAMS PREMIUM STEEL

is a registered trademark of
Abrams Engineering Services GmbH & Co. KG
Hannoversche Str. 38 · 49084 Osnabrueck / Germany
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865
VAT-No.: DE 221940667
General Partner: Abrams Engineering Verwaltungs GmbH
Amtsgericht Osnabrueck / Germany, HRB 20019

T: +49 (0) 5 41/3 57 39-0
F: +49 (0) 5 41/3 57 39-39

sales@premium-steel.eu
www.premium-steel.eu
www.shop.premium-steel.eu
www.steel-guide.eu

www.premium-steel.eu/news

