



Steel grade

| | |
|--|--|
| Material No. / Werkstoff-Nr. | PREMIUM 1.4122 |
| Description | X39CrMo17-1 |
| AISI/SAE | 1.4122 |
| Search for alternatives in the ABRAMS STEEL GUIDE® | www.steel-guide.eu/alternatives/1.4122 |

Specifications



€co-Präz® [€co]
L: 300 mm
L: 500 mm



Precision round steel
without machining allowance [PRS]
bright drawn / ground, ISO h9
L: 1.000 mm
with machining allowance [PRS/BA]
peeled / rough-turned
L: 500 mm
L: 1.000 mm

Chemical composition AISI/SAE 1.4122 (reference value %)

| C | Si | Mn | P | S | Cr | Mo | Ni |
|-------------|---------|---------|-----------|----------|-------------|-----------|---------|
| 0,33 - 0,45 | 0 - 1,0 | 0 - 1,5 | 0 - 0,045 | 0 - 0,03 | 15,5 - 17,5 | 0,8 - 1,3 | 0 - 1,0 |

Physical properties

| | | | | |
|--|---------------------------------|------------|------------|------------|
| Hardness (delivery condition) | max. 325 HB, tempered | | | |
| Tensile strength R _m (as received condition) | approx. 1.100 N/mm ² | | | |
| Working hardness | max. 48 HRC | | | |
| Thermal expansion coefficient 10 ⁻⁶ m/(m • K) | 20 - 100°C | 20 - 200°C | 20 - 300°C | 20 - 400°C |
| | 10,4 | 10,8 | 11,2 | 11,6 |
| Thermal conductivity W/(m • K) | 20°C | | | |
| | 29,0 | | | |

Technical properties

Pre-hardened corrosion resistant chrome-steel with good polishing properties, heat resistance and wear resistance. Often used for processing chemically aggressive plastic materials (e.g. PVC).

Applications


Machine construction, marine engineering, apparatus engineering, plastic processing, plastic moulds, extrusion tools, press moulds, fitting tools, shafts, spindles, bolts, pistons, valves, steam valves, water valves, beater bars, fittings parts, pump construction, pump rods, compressor construction, compressor parts, surgical instruments.

Heat treatment


| | Temperature | Cooling | Hardness | |
|-------------------------|---------------|-------------------------|-------------|--------|
| Soft annealing | 750 - 820°C | Furnace, Air | max. 325 HB | |
| | | | | |
| Stress relief annealing | 600 - 650°C | Furnace | | |
| | | | | |
| Hardening | 1000 - 1040°C | Quenching in | | |
| | | Hot basin (500 - 550°C) | | |
| Tempering | 100°C | 200°C | 500°C | 600°C |
| | 49 HRC | 47 HRC | 45 HRC | 30 HRC |




Thermal expansion coefficient diagram

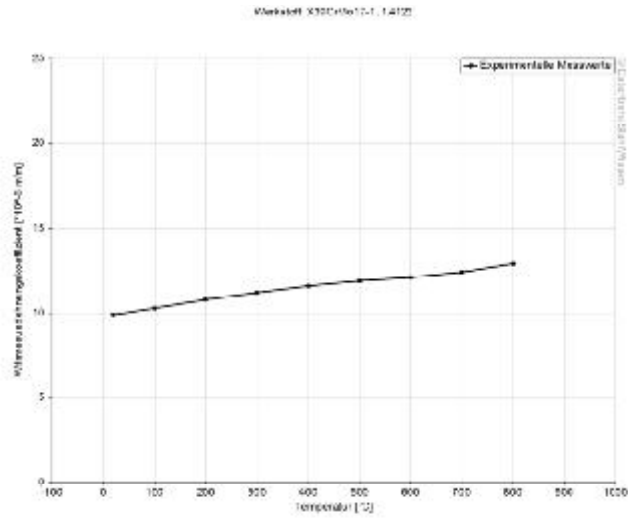



Thermal conductivity diagram

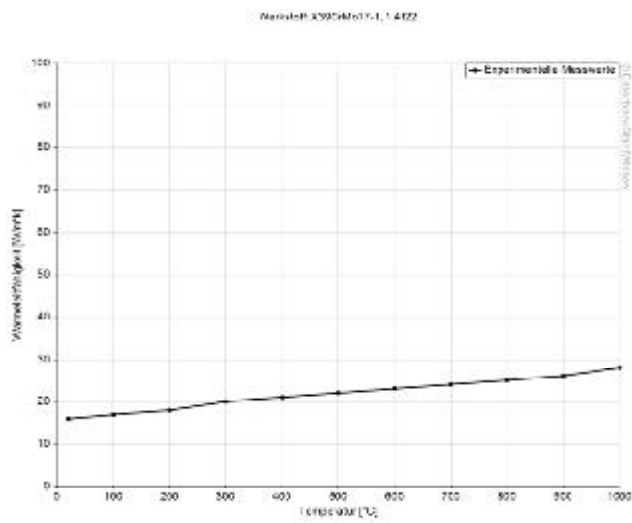


Thermal capacity diagram

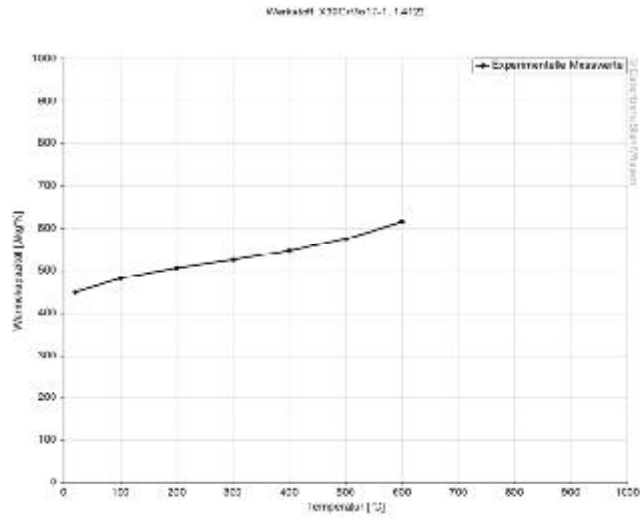


Continuous ZTU-diagrams

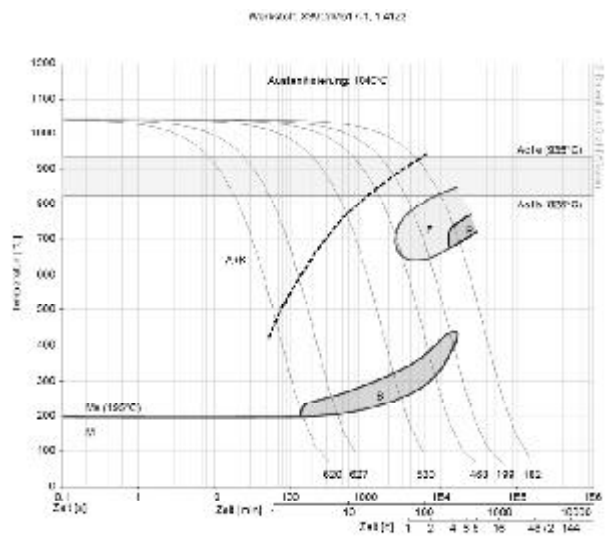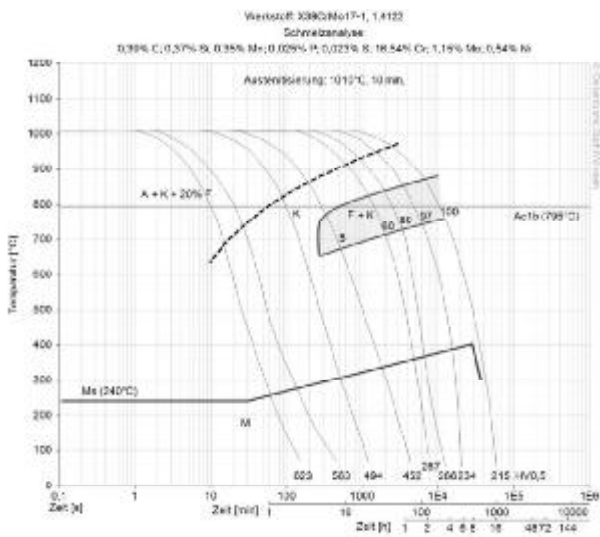

Isothermal ZTU-diagram

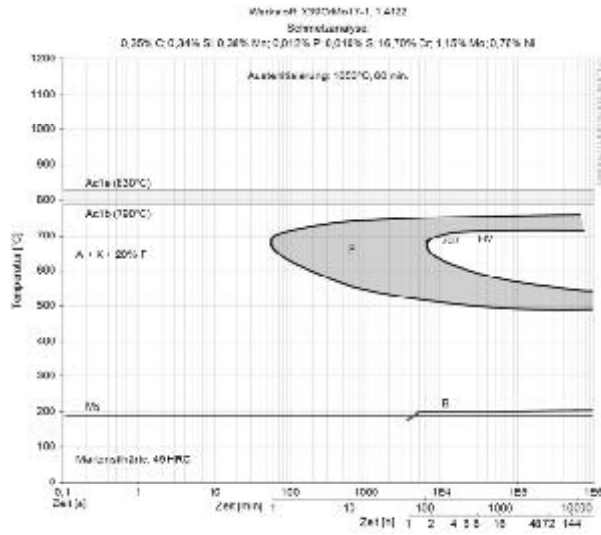

Tempering diagram

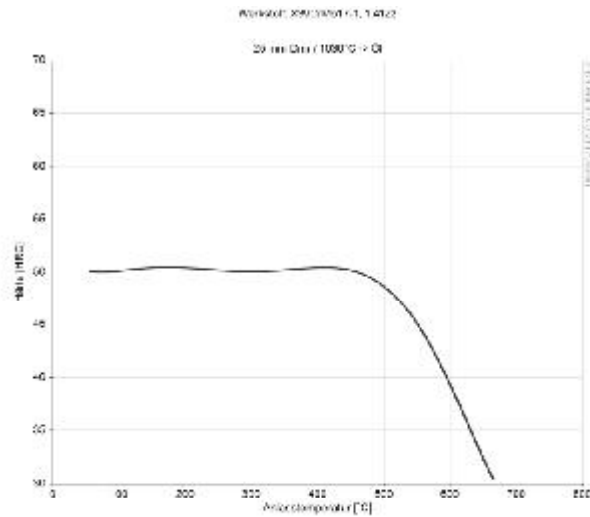

The data shown here is to be used only as an indication of the statistics, thus we accept no liability.
Diagrams are taken from Datenbank StahlWissen Dr. Sommer Werkstofftechnik
Issued: 2012

ABRAMS PREMIUM STEEL

is a registered trademark of
Abrams Engineering Services GmbH & Co. KG
Hannoversche Str. 38 · 49084 Osnabrueck / Germany
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865
VAT-No.: DE 221940667
General Partner: Abrams Engineering Verwaltungs GmbH
Amtsgericht Osnabrueck / Germany, HRB 20019

T: +49 (0) 5 41/3 57 39-0
F: +49 (0) 5 41/3 57 39-39

sales@premium-steel.eu
www.premium-steel.eu
www.shop.premium-steel.eu
www.steel-guide.eu

www.premium-steel.eu/news

