



Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.4305
Description	X8CrNiS18-9
AISI/SAE	303; S30300
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.eu/alternatives/303

Specifications



€co-Präz* [€co]
L: 500 mm



Precision round steel
without machining allowance [PRS]
bright drawn / ground, ISO h9
L: 1.000 mm

Chemical composition AISI/SAE 303 (reference value %)

C	Si	Mn	P	S	Cr	Ni	Cu	N
0 - 0,1	0 - 1,0	0 - 2,0	0 - 0,045	0,15 - 0,35	17,0 - 19,0	8,0 - 10,0	0 - 1,0	0 - 0,11

Physical properties

Hardness (delivery condition)	max. 250 HB, annealed				
Tensile strength R _m (as received condition)	approx. 800 N/mm ²				
Working hardness	max. 20 HRC				
Thermal expansion coefficient 10 ⁻⁶ m/(m • K)	20 - 100°C	20 - 200°C	20 - 300°C	20 - 400°C	20 - 500°C
	16,0	16,5	17,0	17,5	18,0
Thermal conductivity W/(m • K)	20°C				
	15,0				

Technical properties

Corrosion resistant austenitic stainless chrome- nickel-steel with additional sulphur content that allows excellent milling, however, not forgeable, non-weldable (cracking), limited polishing properties. Average mechanical properties, non-magnetisable.

Applications

Food industry, photographic industry, paint industry, oil industry, soap industry, paper industry, textile industry, machine construction, turned parts, fittings construction, kitchen equipment, decoration.


Heat treatment

Soft annealing	Temperature	Cooling	Hardness
	1000 - 1080°C	Air	max. 250 HB




Thermal expansion coefficient diagram

Werkstoff: X8CrNiS18-9, 1.4305

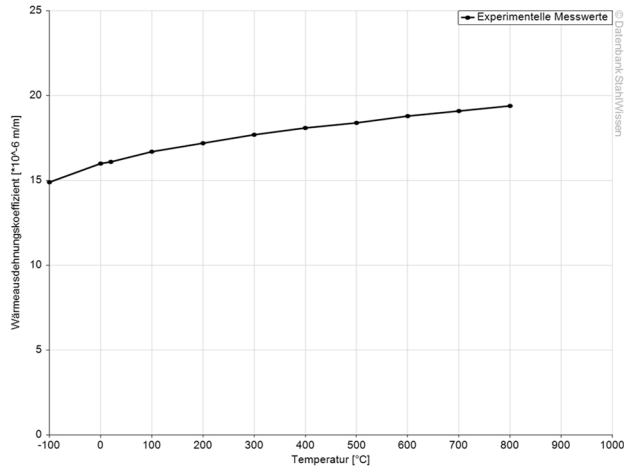

Thermal conductivity diagram

Werkstoff: X8CrNiS18-9, 1.4305

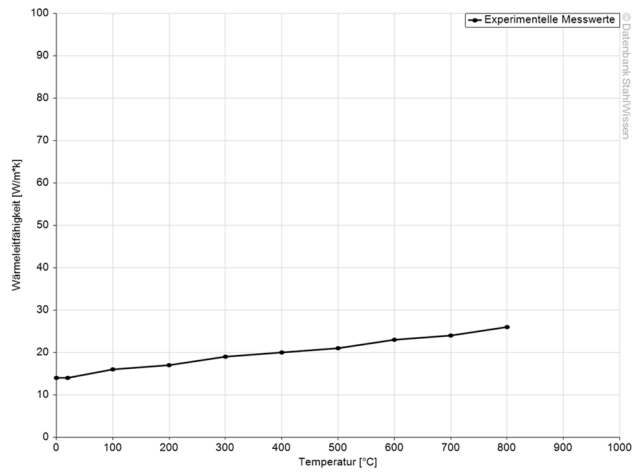

ABRAMS PREMIUM STEEL

is a registered trademark of
Abrams Engineering Services GmbH & Co. KG
Hannoversche Str. 38 · 49084 Osnabrueck / Germany
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865
VAT-No.: DE 221940667
General Partner: Abrams Engineering Verwaltungs GmbH
Amtsgericht Osnabrueck / Germany, HRB 20019

T: +49 (0) 5 41/3 57 39-0
F: +49 (0) 5 41/3 57 39-39


sales@premium-steel.eu
www.premium-steel.eu
www.shop.premium-steel.eu
www.steel-guide.eu

www.premium-steel.eu/news



Thermal capacity diagram

Werkstoff: X8CrNiS18-9, 1.4305

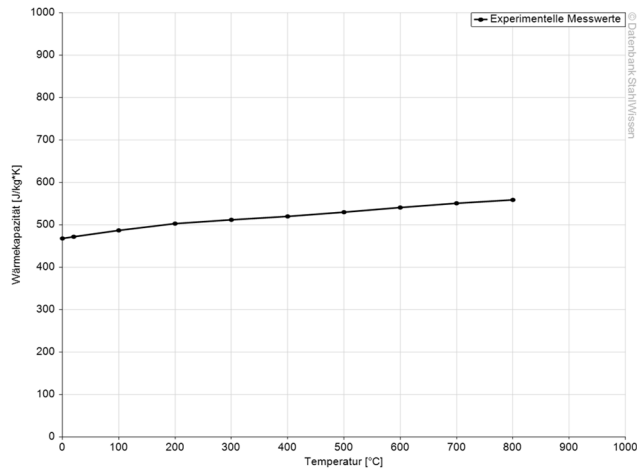

The data shown here is to be used only as an indication of the statistics, thus we accept no liability.
Diagrams are taken from Datenbank StahlWissen Dr. Sommer Werkstofftechnik
Issued: 2012

