



Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.4104
Description	X14CrMoS17
AISI/SAE	430F
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.eu/alternatives/430F

Specifications



€co-Präz* [€co]
L: 500 mm



Precision round steel
without machining allowance [PRS]
bright drawn / ground, ISO h9
L: 1.000 mm

Chemical composition AISI/SAE 430F (reference value %)

C	Si	Mn	P	S	Cr	Mo
0,10 - 0,17	0 - 1,0	0 - 1,5	0 - 0,04	0,15 - 0,35	15,5 - 17,5	0,2 - 0,6

Physical properties

Hardness (delivery condition)	max. 270 HB, tempered			
Tensile strength R_m (as received condition)	approx. 860 N/mm ²			
Working hardness	max. 26 HRC			
Thermal expansion coefficient $10^{-6}m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 400°C
	10,0	10,5	10,5	10,5
Thermal conductivity $W/(m \cdot K)$	20°C			
	25,0			

Technical properties

Martensitic chromium steel with good mechanical properties (tempered condition). The addition of sulphur makes it ideal for machining. It can also be polished very well and is conditionally acid resistant but difficult to weld.

Applications

Automotive industry, electronic equipment, power engineering, mechanical engineering, connecting elements, architecture and decoration, construction parts for automatic machining in water and steam such as screws, spindles, axes, bushes, etc.

Heat treatment

	Temperature	Cooling	Hardness
Soft annealing	750 - 850°C	Air	max. 220 HB
	Temperature	Quenching in	
Hardening	950 - 1070°C	Air, oil, compressed gas (N ₂)	

ABRAMS PREMIUM STEEL

is a registered trademark of
Abrams Engineering Services GmbH & Co. KG
Hannoversche Str. 38 · 49084 Osnabrueck / Germany
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865
VAT-No.: DE 221940667
General Partner: Abrams Engineering Verwaltungs GmbH
Amtsgericht Osnabrueck / Germany, HRB 20019


T: +49 (0) 5 41/3 57 39-0
F: +49 (0) 5 41/3 57 39-39

sales@premium-steel.eu
www.premium-steel.eu
www.shop.premium-steel.eu
www.steel-guide.eu


www.premium-steel.eu/news



Heat treatment scheme

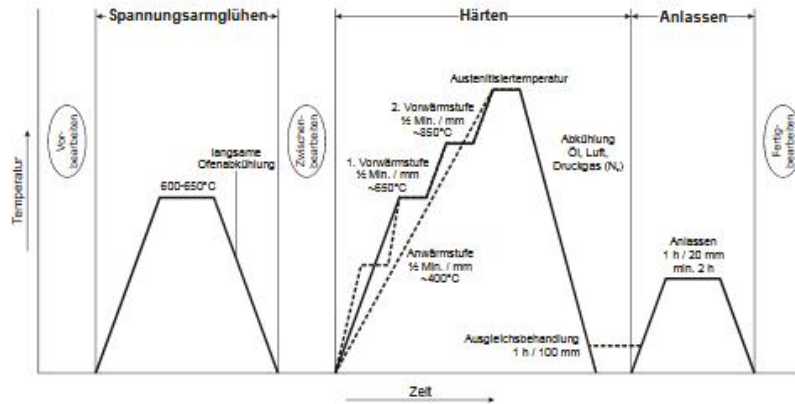

Continuous ZTU-diagram

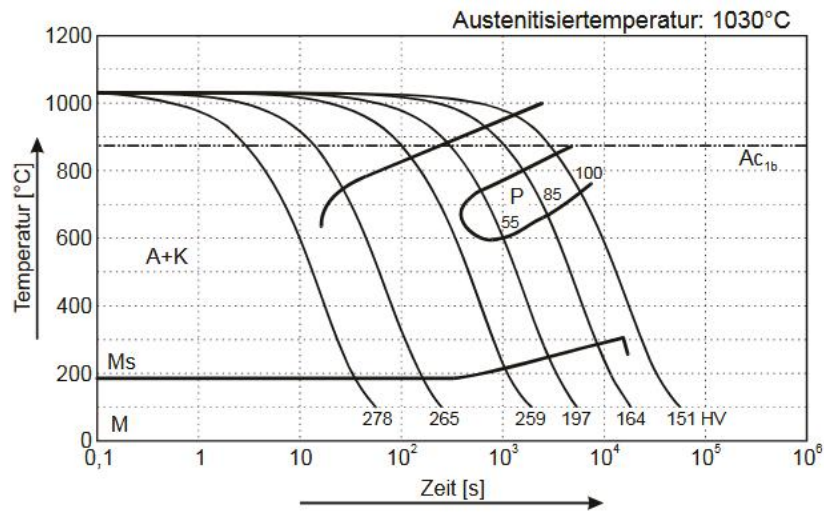

Tempering diagram

