


## Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.4305
Description	X8CrNiS18-9
AISI/SAE	303; S30300
Search for alternatives in the ABRAMS STEEL GUIDE®	<a href="http://www.steel-guide.eu/alternatives/303">www.steel-guide.eu/alternatives/303</a>

## Specifications



**Precision round steel  
without machining allowance [PRS]**  
bright drawn / ground, ISO h9  
L: 1.000 mm

## Chemical composition AISI/SAE 303 (reference value %)

C	Si	Mn	P	S	Cr	Ni	Cu	N
0 - 0,1	0 - 1,0	0 - 2,0	0 - 0,045	0,15 - 0,35	17,0 - 19,0	8,0 - 10,0	0 - 1,0	0 - 0,11

## Physical properties

Hardness (delivery condition)	max. 250 HB, annealed				
Tensile strength $R_m$ (as received condition)	approx. 800 N/mm <sup>2</sup>				
Working hardness	max. 20 HRC				
Thermal expansion coefficient $10^{-6}m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 400°C	20 - 500°C
	16,0	16,5	17,0	17,5	18,0
Thermal conductivity $W/(m \cdot K)$	20°C				
	15,0				

## Technical properties

Corrosion resistant austenitic stainless chrome- nickel-steel with additional sulphur content that allows excellent milling, however, not forgeable, non-weldable (cracking), limited polishing properties. Average mechanical properties, non-magnetisable.

## Applications

Food industry, photographic industry, paint industry, oil industry, soap industry, paper industry, textile industry, machine construction, turned parts, fittings construction, kitchen equipment, decoration.

## Heat treatment

Soft annealing	Temperature	Cooling	Hardness
	1000 - 1080°C	Air	max. 250 HB

## ABRAMS PREMIUM STEEL

is a registered trademark of  
Abrams Engineering Services GmbH & Co. KG  
Hannoversche Str. 38 · 49084 Osnabrueck / Germany  
Managing Director: Dipl.-Wi.-Ing. Dr. Juergen Abrams

Amtsgericht Osnabrueck / Germany, HRA 6865  
VAT-No.: DE 221940667  
General Partner: Abrams Engineering Verwaltungs GmbH  
Amtsgericht Osnabrueck / Germany, HRB 20019


T: +49 (0) 5 41/3 57 39-0  
F: +49 (0) 5 41/3 57 39-39

[sales@premium-steel.eu](mailto:sales@premium-steel.eu)  
[www.premium-steel.eu](http://www.premium-steel.eu)  
[www.shop.premium-steel.eu](http://www.shop.premium-steel.eu)  
[www.steel-guide.eu](http://www.steel-guide.eu)


[www.premium-steel.eu/news](http://www.premium-steel.eu/news)




## Thermal expansion coefficient diagram

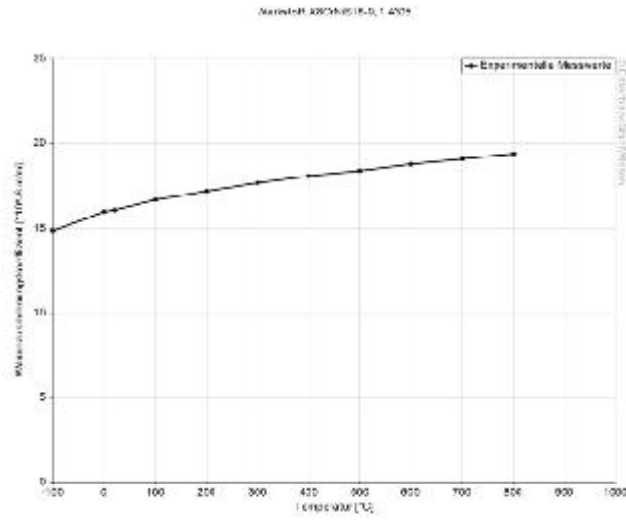

## Thermal conductivity diagram

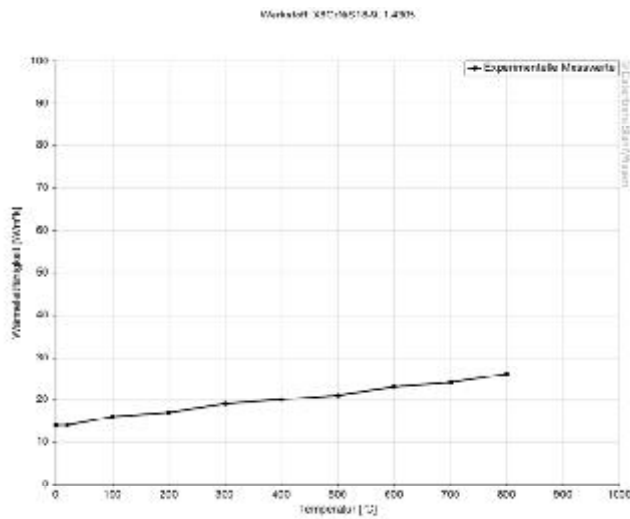

Thermal capacity diagram

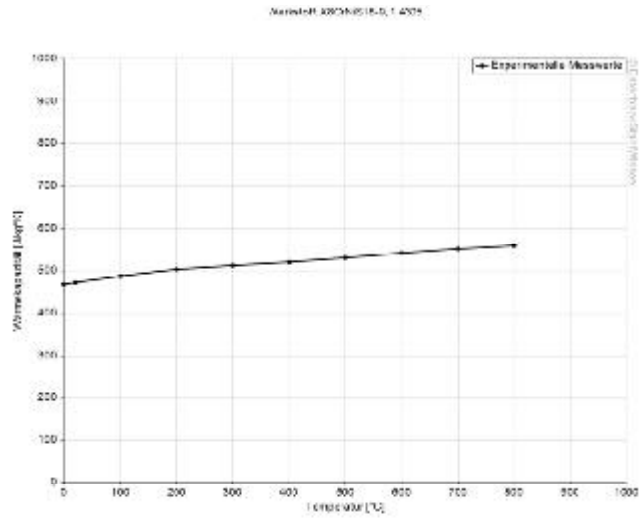

The data shown here is to be used only as an indication of the statistics, thus we accept no liability.  
 Diagrams are taken from Datenbank StahlWissen Dr. Sommer Werkstofftechnik  
 Issued: 2012

